

軽量ビームAX


AX 受金具一体式ビーム




施工寸法と仕様

品名	施工躯体寸法 (mm)	単重 (kg)	許容曲げモーメント (kg·cm)	許容端部反力
AX-11-14型	1,110~1,470	11.3	20,000	720 (kg/片側)
AX-14-18型	1,460~1,825	12.5	20,000	
AX-18-25型	1,825~2,530	19.0	43,000	
AX-25-32型	2,525~3,230	23.0	53,000	
AX-32-39型	3,225~3,930	28.0	61,000	
AX-39-46型	3,925~4,630	35.0	65,000	


●AX-11-14型




●AX-14-18型

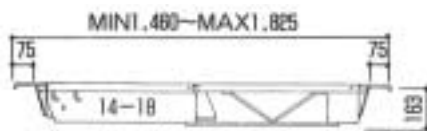


●AX-18-25型

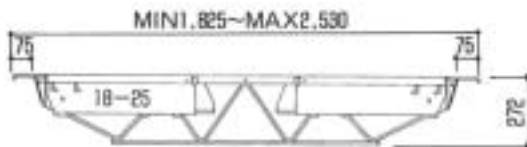


●AX-25-32型

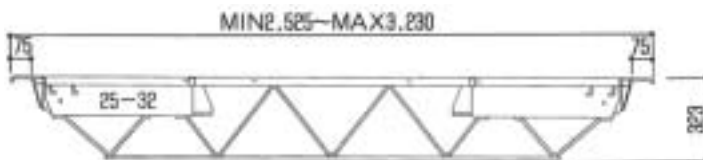

●AX-32-39型

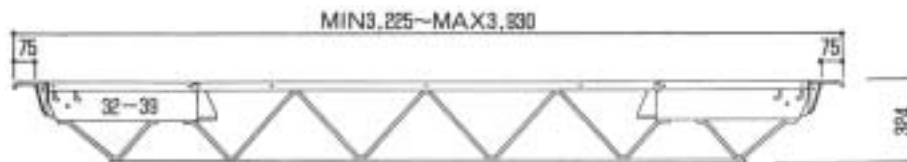

●AX-39-46型

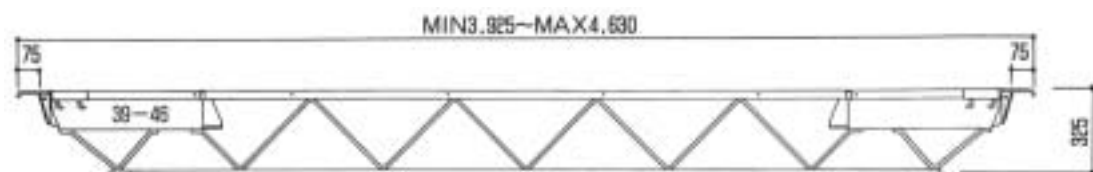

端部詳細図

